

OLED DISPLAY SPECIFICATION



RAYSTAR

RAYSTAR Optronics, Inc.
曜凌光電股份有限公司



曜凌光電股份有限公司
Raystar Optronics, Inc.

T: +886-4-2565-0761 | F: +886-4-2565-0760

salescontact@raystar-optronics.com | www.raystar-optronics.com

REA012864D-01

General Specification


The features is described as follow:

- Module Dimension: 38.00 × 28.50 × 2.37 mm
- Active Area: 21.74 × 10.86 mm
- Dot Matrix: 128 × 64
- Dot Size: 0.148 × 0.148 mm
- Dot Pitch: 0.17 × 0.17 mm
- Display Mode : Passive Matrix
- Duty: 1/64 Duty
- Display Color: Monochrome
- IC: SSD1306BZ
- Interface:I2C, Optional SPI
- Size: 0.96-inch

Interface Pin Function

Pin No.	Symbol	Function
1	SDA	When serial interface mode is selected, D0 will be the serial clock input: SCLK; D1 will be the serial data input: SDIN.
2	SCL	When I2C mode is selected, D2, D1 should be tied together and serve as SDAout, SDAin in application and D0 is the serial clock input, SCL.
3	SA0	In I2C mode, this pin acts as SA0 for slave address selection. When 3-wire serial interface is selected, this pin must be connected to VSS.
4	RST	This pin is reset signal input. When the pin is pulled LOW, initialization of the chip is executed. Keep this pin HIGH (i.e. connect to VDD) during normal operation.
5	CS	This pin is the chip select input. (active LOW).
6	VDD	3.0V Power supply pin for core logic operation.
7	VIN	5.0V Power supply pin for core logic operation.
8	GND	This is a ground pin.

Contour Drawing

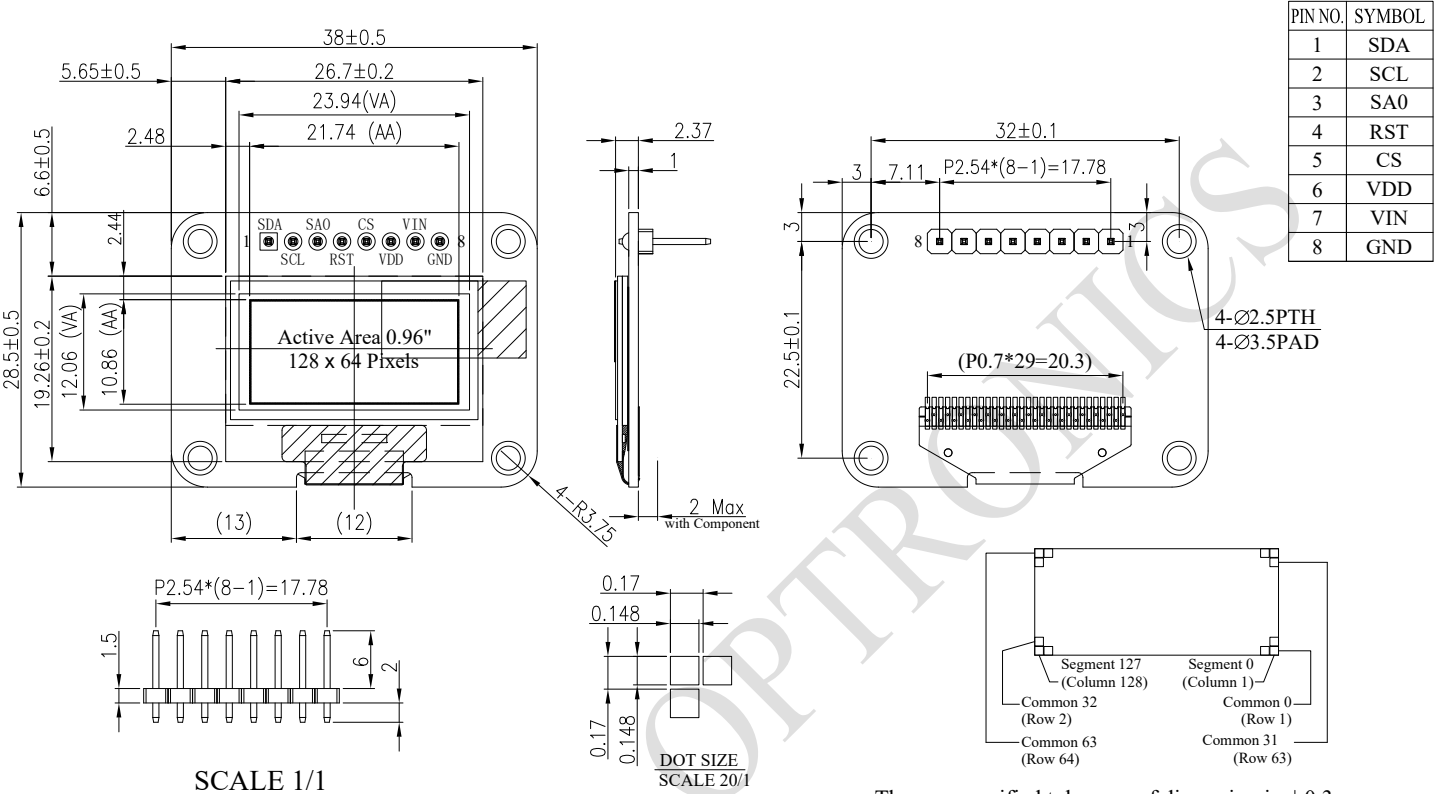

The non-specified tolerance of dimension is ±0.3mm.

Absolute Maximum Ratings

Parameter	Symbol	Min	Max	Unit
Supply Voltage for Logic	VDD	1.65	3.3	V
Supply Voltage for Logic	VIN	4.0	6.0	V
Operating Temperature	TOP	-40	+80	°C
Storage Temperature	TSTG	-40	+85	°C

Electrical Characteristics

DC Electrical Characteristics

Item	Symbol	Condition	Min	Typ	Max	Unit
Supply Voltage for Logic (3V)	VDD	—	3.0	3.2	3.3	V
Supply Voltage for Logic (5V)	VIN	—	4.8	5.0	5.2	V
Input High Volt	VIH	—	$0.8 \times VDD$	—	VDD	V
Input Low Volt	VIL	—	0	—	$0.2 \times VDD$	V
Output High Volt	VOH	—	$0.9 \times VDD$	—	VDD	V
Output Low Volt	VOL	—	0	—	$0.1 \times VDD$	V
50% Check Board Operating Current	IDD	VDD=3.3V	—	15	23	mA