

OLED DISPLAY SPECIFICATION



RAYSTAR

RAYSTAR Optronics, Inc.
曜凌光電股份有限公司



曜凌光電股份有限公司 Raystar Optronics, Inc.

T: +886-4-2565-0761 | F: +886-4-2565-0760

salescontact@raystar-optronics.com | www.raystar-optronics.com

REA012864D-03

General Specification


The features is described as follow:

- Module Dimension: 27.30 × 27.30 × 2.37mm
- Active Area: 21.74 × 10.86 mm
- Dot Matrix: 128 × 64
- Dot Size: 0.148 × 0.148 mm
- Dot Pitch: 0.17 × 0.17 mm
- Display Mode : Passive Matrix
- Duty: 1/64 Duty
- Display Color: Monochrome
- IC: SSD1306
- Interface:I2C
- Size: 0.96-inch

Interface Pin Function

Pin No.	Symbol	Function
1	VCC	Power supply input: 2.8 – 5.2V
2	GND	Ground
3	SCL	The serial clock input.
4	SDA	The serial data input/output.

Contour Drawing

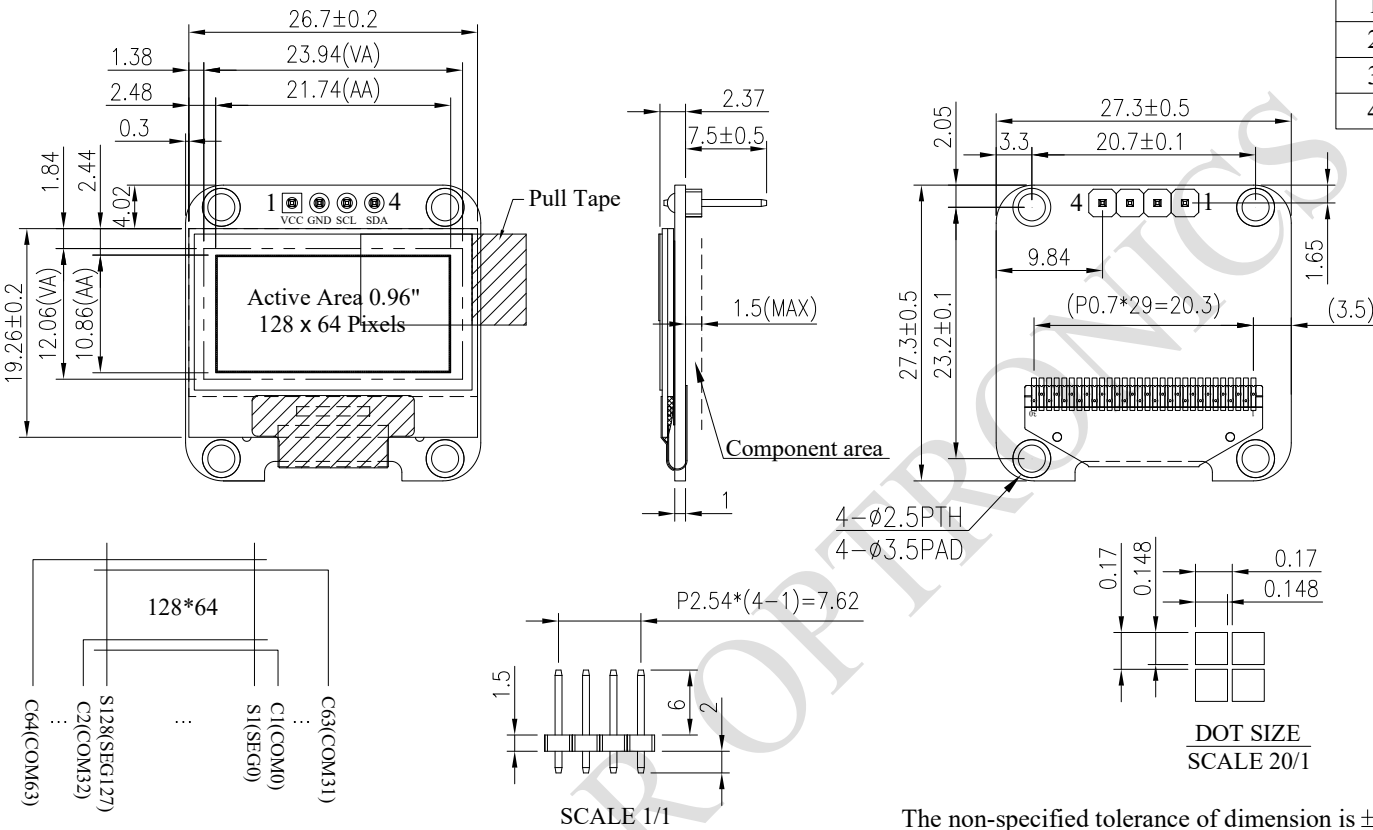

PIN	SYMBOL
1	VCC
2	GND
3	SCL
4	SDA

The non-specified tolerance of dimension is ± 0.3 mm .

Absolute Maximum Ratings

Parameter	Symbol	Min	Max	Unit
Supply Voltage for Logic	VCC	1.65	5.5	V
Operating Temperature	TOP	-40	+80	°C
Storage Temperature	TSTG	-40	+85	°C

Electrical Characteristics

DC Electrical Characteristics

Item	Symbol	Condition	Min	Typ	Max	Unit
Supply Voltage for Logic	VCC	—	3.0	3.3	5.2	V
Input High Volt	VIH	—	0.8×VCC	—	VCC	V
Input Low Volt	VIL	—	0	—	0.2×VCC	V
Output High Volt	VOH	—	0.9×VCC	—	VCC	V
Output Low Volt	VOL	—	0	—	0.1×VCC	V
50% Check Board Operating Current	ICC	VCC=3.3V	—	15	23	mA