

OLED DISPLAY SPECIFICATION



RAYSTAR

RAYSTAR Optronics, Inc.
曜凌光電股份有限公司



曜凌光電股份有限公司 Raystar Optronics, Inc.

T: +886-4-2565-0761 | F: +886-4-2565-0760

salescontact@raystar-optronics.com | www.raystar-optronics.com

REX012840A

General Specification

The Features is described as follow:


- Module Dimension: $36.74 \times 14.00 \times 1.26$ mm
- Active Area: 31.852×8.66 mm
- Dot Matrix: 128 x 40
- Dot Size: 0.229×0.197 mm
- Dot Pitch: 0.249×0.217 mm
- Duty: 1/40 Duty
- Display Color: Monochrome
- Gray Scale: 2 (White/Black)
- Dimmer Steps: 256 step
- IC: SH1106G-0E
- Interface: SPI/I2C
- Size: 1.3-inch

Interface Pin Function

Pin No.	Symbol	I/O	Function
1	IXS	I	SPI/I2C Selection.
2	SCLK/ SCL	I	Clock.
3	SDIN/ SDA	I	Data.
4	DC	I	Data/Command Selection.
5	CSB	I	Chip Selection.
6	RSTB	I	Reset.
7	VDD	P	Logic Power Supply.
8	IREF	-	Segment Current Reference.
9	VCC	P	OLED Drive Power Supply.
10	VCOMH	O	This is a pad for the voltage output high level for common signals. A capacitor should be connected between this pad and VSS.
11	GND	P	GND.

I:Input, O:Output, P:Power

Contour Drawing

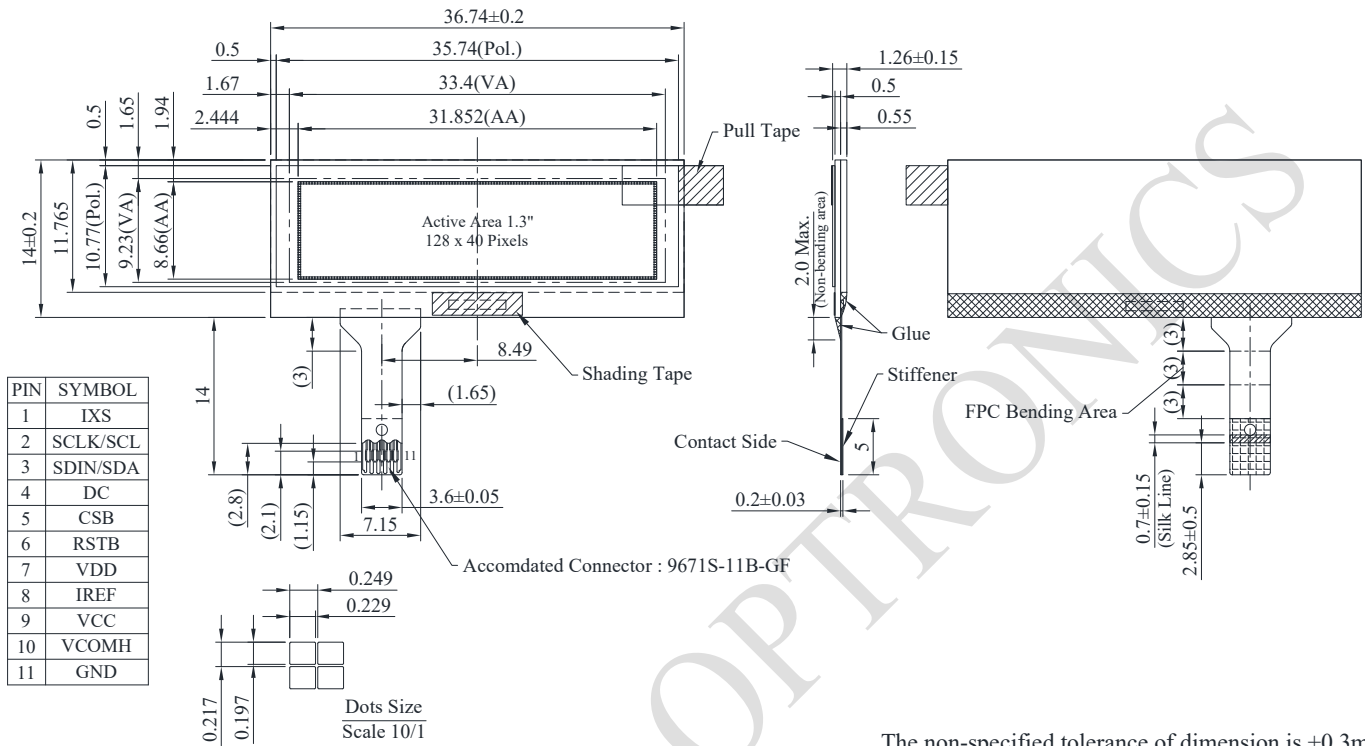

The non-specified tolerance of dimension is $\pm 0.3\text{mm}$.

Absolute Maximum Ratings

Parameter	Symbol	Min	Max	Unit
OLED Drive Power Supply Voltage	VCC	-0.3	14.5	V
Logic Power Supply Voltage	VDD	-0.3	3.6	V
Signal Input Voltage	V _i	-0.3	VDD+0.3	V
Operating Temperature	TOP	-40	+80	°C
Storage Temperature	TSTG	-40	+85	°C

Electrical Characteristics

DC Characteristics

Item	Symbol	Condition	Min	Typ	Max	Unit
OLED Drive Power Supply Voltage	VCC	—	6.4	12.0	12.5	V
Logic Power Supply Voltage	VDD	—	1.65	3.3	3.5	V
Input High Volt	V _{IH}	—	0.8xVDD	—	VDD	V
Input Low Volt	V _{IL}	—	0	—	0.2xVDD	V
Output High Volt	V _{OH}	—	0.8xVDD	—	VDD	V
Output Low Volt	V _{OL}	—	0	—	0.2xVDD	V
Display 50% Pixel on	ICC	VCC=12V	—	6.5	9.0	mA